



DC/DC 铁路机车整机工控电源

JWDKR 铁路机车整机工控电源--200W 单路输出

JWDKR Railway locomotive Switching Power Supply-- 200W Single Output

典型性能 Typical Performance

- ◆ 外形尺寸: 200*98*40 (mm)
Dimension: 200*98*40 (mm)
- ◆ 宽输入电压范围
Wide range input voltage
- ◆ 高效率、高功率密度、低纹波
High efficiency、High power density、Low ripple & noise
- ◆ 105°C长寿命电解电容
105°C long life electrolytic capacitors
- ◆ 金属外壳，八面屏蔽，
Metal shell, Eight face shield
- ◆ 安规: EN60950
Ann rules: EN60950



输入特性 Input Features

输入电压范围 Input voltage range	标称 110V Nominal voltage 110V	66~160VDC
-------------------------------	---------------------------------	-----------

输出特性 Output Features

输出电压精度 Voltage tolerance	标称电压 Nominal voltage	$\leq \pm 1\%$ ($5V \leq \pm 2\%$)
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	$\leq \pm 0.5\%$
可调范围 Adjustment range		$\pm 10\%$
负载调整率 Load regulation	20%~100%负载变化 20%~100% Load change	$V_o \leq \pm 0.5\%$
纹波噪声 Ripple&Noise	20M 带宽 20M Bandwidth	$\leq 1\%$
温度系数 Temperature coefficient		$\pm 0.02\%/{^\circ}C$
过流保护 Output over circuit Protection		115~150%额定电流,自恢复 115~150%rated output circuit,auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term,auto recovery
过冲幅度 Overshoot	25%额定负载变化 25% rated load change	$\leq 500\mu S$
	$\Delta V_{o1} / V_{o1}$	$\leq \pm 4.0\%$

一般特性 General Features

隔离耐压 Withstand voltage	输入对输出、输入对地 I/P-O/P、I/P-F/G 输入对地 I/P-F/G (1分钟, 漏电流 $\leq 5mA$) (1Mintute ,leakage current) $\leq 5mA$)	1500VAC 500VAC
绝缘电阻 Isolation resistance	500V	$\geq 50M\Omega$
MTBF	环境 25°C Environment 25°C	2.0×10^5 Hrs
工作温度 Operating temperature	55°C以上降额使用 Above 55°C derating make	-40°C~70°C
储存温度 Storage temperature		-40°C~85°C
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

命名方式 Naming Rules

JWDKR200-110 S 5

输出电压
 Output voltage
 单路输出
 Single Output
 标称输入电压
 Nominal Input voltage
 输出功率
 Output power
 DC/DC 铁路机车整机工控电源
 DC/DC Railway locomotive Switching Power Supply

产品选型 Product selection

产品型号 Model No.	输入电压范围 Input voltage V_{in}	输出电压 Output voltage V_o	输出电流 Output current I_o	纹波噪声 R & N $V_{(P-P)mV}$	效率 Efficiency
JWDKR200--110S9	66~160V	9V	22.2A	100	82%
JWDKR200--110S12		12V	16.7A	120	83%
JWDKR200--110S15		15V	13.3A	120	83%
JWDKR200--110S24		24V	8.4A	150	84%
JWDKR200--110S48		48V	4.2A	200	89%
JWDKR200--110S9	45~135V	5V	22.2A	100	82%
JWDKR200--72S12		12V	16.7A	120	83%
JWDKR200--72S15		15V	13.3A	120	83%
JWDKR200--72S24		24V	8.4A	150	84%
JWDKR200--72S48		48V	4.2A	200	89%


注：1、纹波噪声测试方法：使用一根12”双绞线，在终端并联0.1uF和47uF电容，在20MHz带宽下测试。

2、因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Note: 1、 Ripple & noise are measured at 20MHz of bandwidth by using a 12"twisted pair-wire terminatedwith a 0.1uF & 47uF parallel capacitor.

2、Due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department..

安装尺寸图 MechanicalData

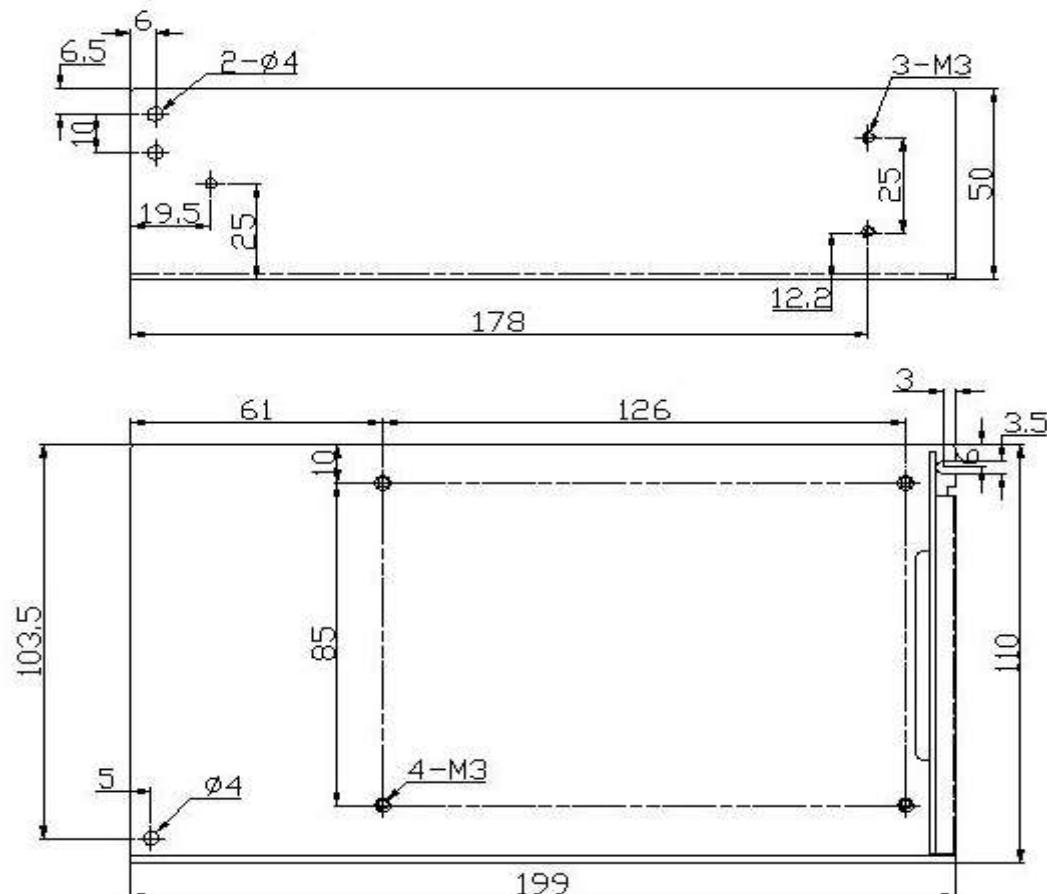

注：电源安装尺寸如与选型手册不符，请以实物尺寸为准。

Note: Power mechanical data does not match with the hand book, Please refer to product size.