

**JWAK 整机工控电源系列--50W 四路输出**

JWAK Switching Power Supply Series--50W Quade Output

**典型性能 Typical Performance**

- ◆外形尺寸: 130\*98\*40 (mm)  
Dimension: 130\*98\*40 (mm)
- ◆宽输入电压范围  
Wide range input voltage
- ◆高效率、高功率密度、低纹波  
High efficiency、High power density、Low ripple & noise
- ◆105℃长寿命电解电容  
105℃ long life electrolytic capacitors
- ◆高可靠性、三年保修  
High reliability、three-year warranty
- ◆安规: EN60950  
Ann rules: EN60950



**输入特性 Input Features**

输入电压范围 Input voltage range	W:85~265VAC 120~370VDC N:165~265VAC 230~370VDC	110VAC 220VAC
输入电压频率 Input voltage frequency		47~63Hz
输入冲击电流 Inrush current	230VAC 冷启动 230VAC Cold start,	≦ 30A

**输出特性 Output Features**


输出电压精度 Voltage tolerance	标称电压 Nominal voltage	$V_{O1} \leq \pm 1\%$ (3.3V、5V $\leq \pm 2\%$ ), $V_{O2}$ 、 $V_{O3} \leq \pm 3\%$ , $V_{O4} \leq \pm 6\%$
电压调整率 Line regulation	输入电压从低端到高端变化 Change of input voltage from lowend to highend	$V_{O1} \leq \pm 0.5\%$ , $V_{O2}$ 、 $V_{O3}$ 、 $V_{O4} \leq \pm 1.5\%$
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	$V_{O1} \leq \pm 0.5\%$ , $V_{O2}$ 、 $V_{O3} \leq \pm 3\%$ , $V_{O4} \leq \pm 6\%$
温度系数 Temperature coefficient		$\pm 0.02\%/^{\circ}\text{C}$
过功率保护 Output overload Protection		115~150%额定电流,自恢复 115~150%rated output powerI, auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term ,auto recovery
效率 Efficiency	输入标称电压、满载 Input rated voltage、 Full load	76% (典型值) 75%(typical)
启动时间 Rise time	220VAC 满载 220VAC Full load	500mS (典型值) 5000ms (typical)
保持时间 Hold up time	220VAC 满载 220VAC Full Full load	50mS (典型值) 50ms (typical)

**一般特性 General Features**

隔离耐压 Withstand voltage	输入对输出、输入对地 I/P-O/P、I/P-F/G 输出对地 O/P -F/G 输出对输出(隔离) O/P-O/P( (1分钟,漏电流 $\leq 5\text{mA}$ ) (1Mintute leakage current) $\leq 5\text{mA}$ )	1500VAC  500VAC  500VDC
绝缘电阻 Isolation resistance	500V	$\geq 50\text{M}\Omega$
MTBF	环境 25℃ Environment 25℃	$2.0 \times 10^5 \text{Hrs}$
工作温度 Operating temperature	55℃以上降额使用 Above 55℃ derating make	-25℃~70℃(-40℃~70℃)
储存温度 Storage temperature		-40℃~85℃
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

## 命名方式 Naming Rules

JWAK- 50 S 5 D12 S24 W(N)I

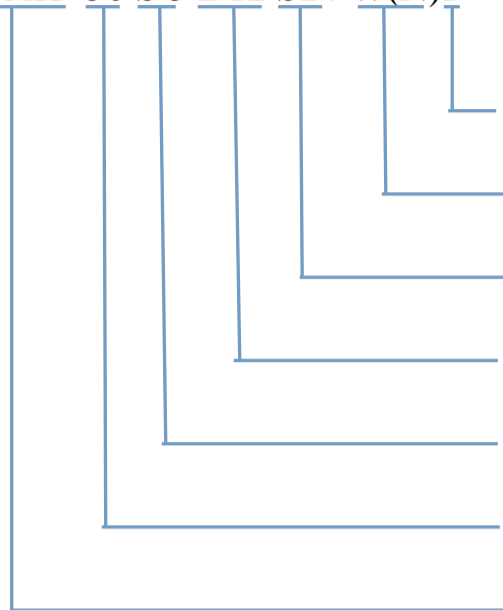

隔离输出  
Isolate output  
输入电压范围 (W:85~265V, N:165~265V)  
Input voltage range (W:85~265V, N:165~265V)  
输出电压  $V_{O4}$   
Output voltage  $V_{O4}$   
输出电压  $V_{O2}$ 、 $V_{O3}$  共地输出  
Output voltage  $V_{O2}$ 、 $V_{O3}$  common-GND output  
输出电压  $V_{O1}$   
voltage  $V_{O1}$   
输出功率  
Output power  
AC/DC 工控电源  
AC/DC Switching Power Supply

## 产品选型 Product Selection Table

产品型号 Model No.	输出电压 Output voltage $V_O$	输出电流 Output current $I_O$	输出电压精度 Output voltage tolerance	纹波噪声 R&N $V_{(P-P)mV}$	效率 Efficiency
JWAK-50S5D12S-5W(N)I	+5V	0.2~3.0A	±2%	100mV	75%
	+12V	0.1~1.5.A	±5%	120mV	
	-12V	0.1~1.0A	±5%	120mV	
	-5V	0.1~1.0A	±5%	100mV	
JWAK-50S5D12S24W(N)I	+5V	0.2~3.0A	±2%	100mV	77%
	+12V	0.1~1.5A	±5%	120mV	
	-12V	0.1~1.0A	±5%	120mV	
	+24V	0.1~0.5A	±5%	150mV	
WAK-50S5D12S12W(N)I	+5V	0.2~3.0A	±2%	100mV	76%
	+12V	0.1~1.0A	±5%	120mV	
	-12V	0.1~1.0A	±5%	120mV	
	+12V	0.1~1.0A	±6%	120mV	
JWAK-50S5D12S15W(N)I	+5V	0.2~3.0A	±2%	80mV	76%
	+12V	0.1~1.0A	±5%	120mV	
	-12V	0.1~0.5A	±5%	120mV	
	+15V	0.1~0.5A	±5%	120mV	
JWAK-50S5D15S-5W(N)I	+5V	0.5~3.0A	±2%	100mV	75%
	+15V	0.1~1.5A	±5%	120mV	
	-15V	0.1~1.0A	±5%	120mV	
	-5V	0.1~1.0A	±5%	100mV	
JWAK-50S5D15S12W(N)I	+5V	0.5~3.0A	±2%	80mV	76%
	+15V	0.1~1.0A	±5%	120mV	
	-15V	0.1~1.0A	±5%	120mV	
	+12V	0.1~0.3A	±5%	80mV	


注：1、纹波噪声测试方法：使用一根 12" 双绞线，在终端并联 0.1uF 和 47uF 电容，在 20MHz 带宽下测试。

2、因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Note: 1、Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor

2、Due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company's sales department.

## 安装尺寸图 Mechanical Data

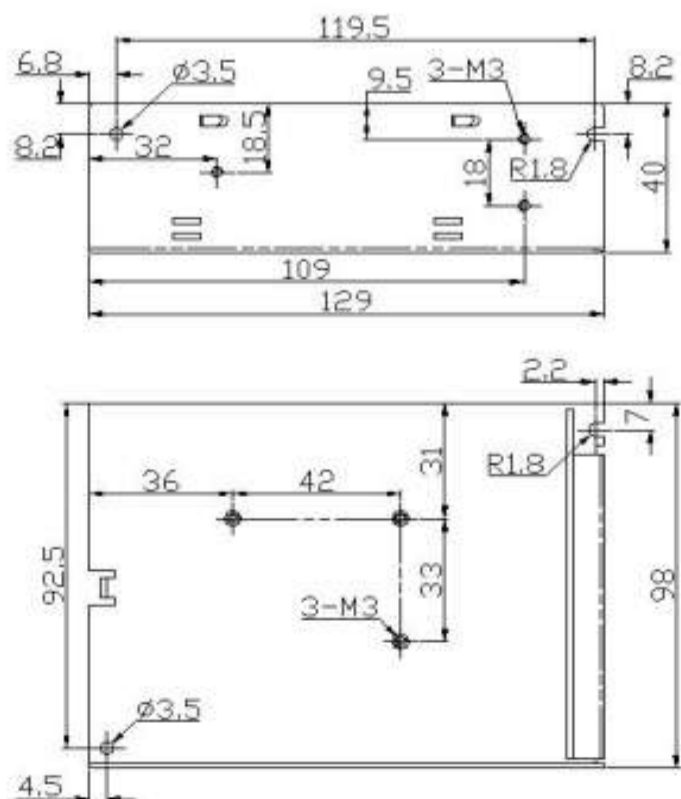

注：电源安装尺寸如与选型手册不符，请以实物尺寸为准。

Note: Power mechanical data does not match with the hand book, Please refer to product size.