



DC/DC 铁路机车电源模块

DC/DC Railway locomotive power supply module

JWDHR--15W 单路输出 H 型封装系列

JWDHR--15W single output H Package type series

典型性能 Typical Performance

- ◆外形尺寸: 62*46*25 (mm)
Dimension: 62*46*25 (mm)
- ◆宽输入电压范围
Wide range input voltage
- ◆105°C长寿命电解电容
105°C long life electrolytic capacitors
- ◆高效率、高功率密度、低纹波
High efficiency、High power density、Low ripple & noise
- ◆黑金属外壳, 八面屏蔽, 通孔安装
Black metal shell, Eight face shield, Hole is installed
- ◆安规: EN60950
Ann rules: EN60950



输入特性 Input Features

输入电压范围 Input voltage range	标称 110V Nominal voltage 110V 标称 72V Nominal voltage 110V(W)	66~160VDC 45~135VDC
-------------------------------	--	----------------------------

输出特性 Output Features


输出电压精度 Voltage tolerance	标称电压 Nominal voltage	$\leq \pm 1\%$ (3.3V、5V $\leq \pm 2\%$)
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	$\leq \pm 0.5\%$
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	$V_O \leq \pm 0.5\%$
纹波噪声 Ripple&Noise	20M 带宽 20M Bandwidth	$\leq 1\%$
温度系数 Temperature coefficient		$\pm 0.02\%/^{\circ}\text{C}$
过流保护 Output overcircuit Protection		115~150%额定电流, 自恢复 115~150%rated output circuit, auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term, auto recovery
启动延迟时间 Turn-on delay time	输入标称电压、满载 Input rated voltage、Fullload	$\leq 300\text{mS}$
保持时间 Hold up time	输入标称电压、满载 Input rated voltage、Fullload	80mS (典型值) 80ms (typical)
过冲幅度 Overshoot	25% 额定负载变化 25% rated load change	$\leq 500\mu\text{S}$
	$\Delta V_{O1} / V_{O1}$	$\leq \pm 5.0\%$

一般特性 General Features

隔离耐压 Withstand voltage	输入对输出 I/P-O/P (1 分钟, 漏电流 $\leq 5\text{mA}$) (1Mintute ,leakage current) $\leq 5\text{mA}$)	1500VDC
绝缘电阻 Isolation resistance	500V	$\geq 100\text{M}\Omega$
MTBF	环境 25°C Environment 25°C	$2.0 \times 10^5 \text{Hrs}$
开关频率 switching frequency		300KHz
工作温度 Operating temperature	70°C 以上降额使用 Above 75°C derating make	-45°C ~ -85°C
储存温度 Storage temperature		-45°C ~ 105°C
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

命名方式 Naming Rules

JWDH R 15-110 S 5

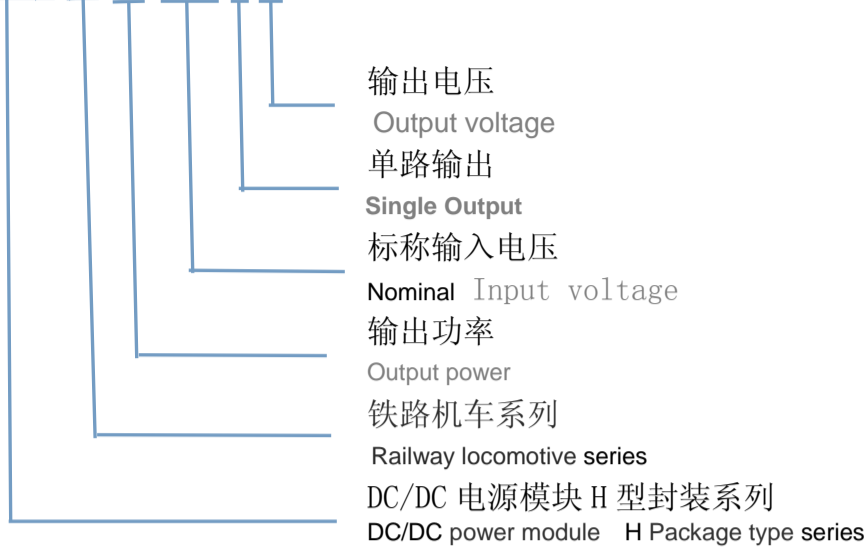

产品选型 Product selection

产品型号 Model No.	输入电压范围 Input voltage V_{in}	输出电压 Output voltage V_O	输出电流 Output current I_o	纹波噪声 R & N $V_{(P-P)mV}$	最大容性负载 Capacitive load maximum	效率 Efficiency
JWDHR15-110S3.3	66~160V	3.3V	4.55A	80	4020 μ F	76%
JWDHR15-110S5		5V	3.00A	80	3300 μ F	78%
JWDHR15-110S12		12V	1.25A	100	1100 μ F	82%
JWDHR15-110S15		15V	1.00A	100	650 μ F	83%
JWDHR15-110S24		24V	0.63A	120	330 μ F	85%
JWDHR15-72S3.3	45~135V	3.3V	4.55A	80	4020 μ F	76%
JWDHR15-72S5		5V	3.00A	80	3300 μ F	79%
JWDHR15-72S12		12V	1.25A	100	1100 μ F	83%
JWDHR15-72S15		15V	1.00A	100	650 μ F	84%
JWDHR15-72S24		24V	0.63A	120	330 μ F	86%


注：因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

输出纹波噪声（峰-峰值）的测量，请参照模块测试说明中介绍的方法进行。

Note: Due to space limitations, the above list is only for some products, If other than a list of products, please contact the Company's sales department.

Output ripple noise measurement (peak - peak), please refer to the module test notes method is introduced.

封装尺寸图 Mechanical Data

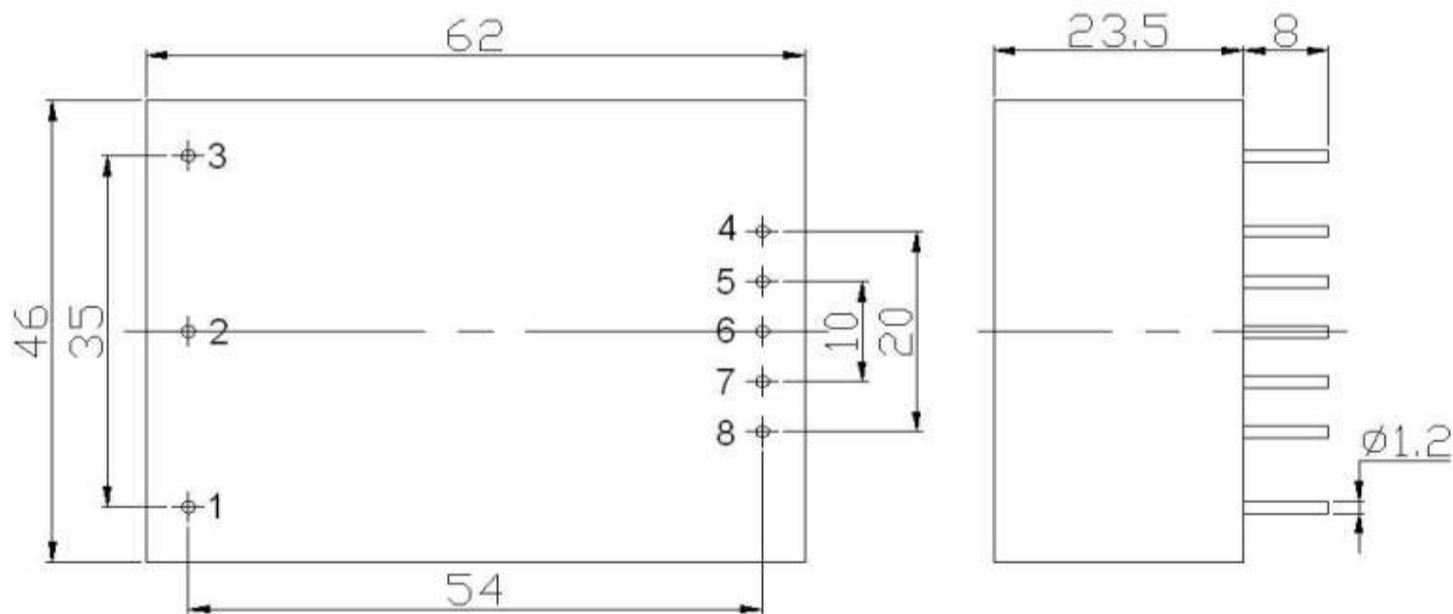

管脚定义 Pin Assignments


P1	P2	P3	P4	P5	P6	P7	P8
FG	V_{in+}	V_{in-}	V_{O+}	NP	NP	NP	GND

注：电源模块的外形尺寸和管脚定义如与选型手册不符，请以实物实际尺寸为准。


Note: Dimensions and pin definitions of power module such as inconsistent with the hand book, please in kind prevail actual size

典型曲线 Typical curve

降额曲线
Derating curve

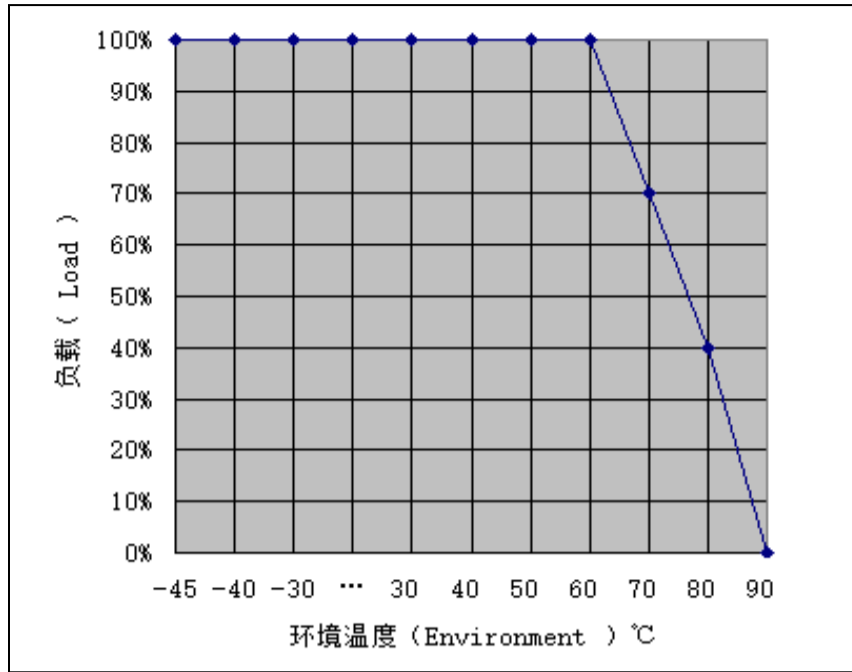

效率曲线
Efficiency curve

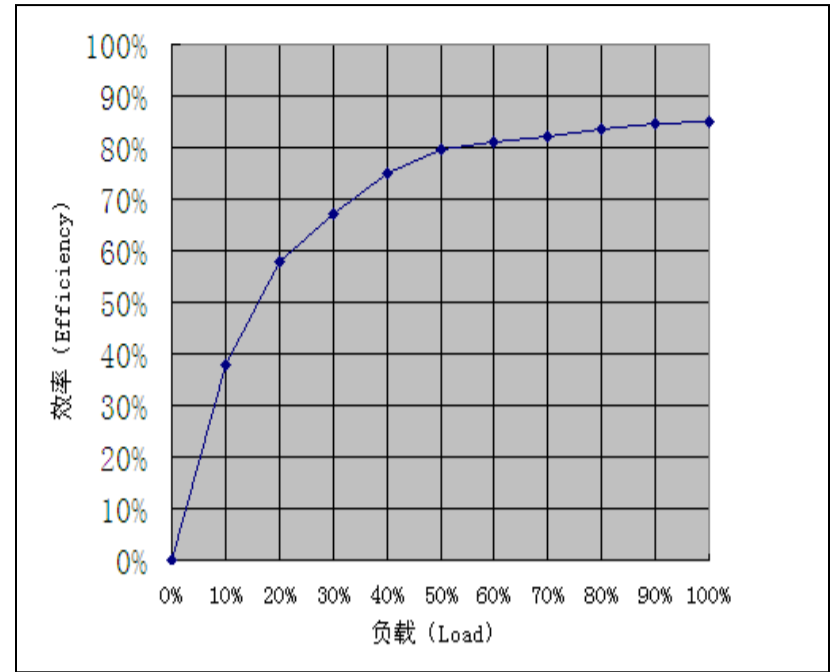

纹波噪声测试: (靠测法 20MHz)

测试方法: 纹波&噪声用示波器来测试。测试模块噪声时为了避免引入额外噪声, 须用示波器探头直接接触模块输出引脚

