



# DC/DC 铁路机车电源模块

## DC/DC Railway locomotive power supply module

JWDHR--10W 双路隔离输出 H 系列

JWDHR--10W dual isolate output H series

### 典型性能 Typical Performance

- ◆ 外形尺寸: 62\*46\*25 (mm)  
Dimension: 62\*46\*25 (mm)
- ◆ 宽输入电压范围  
Wide range input voltage
- ◆ 105°C长寿命电解电容  
105°C long life electrolytic capacitors
- ◆ 高效率、高功率密度、低纹波  
High efficiency、High power density、Low ripple & noise
- ◆ 黑金属外壳，八面屏蔽，通孔安装  
Black metal shell, Eight face shield, Hole is installed
- ◆ 安规: EN60950  
Ann rules: EN60950



### 输入特性 Input Features

输入电压范围 Input voltage range	标称 110V Nominal voltage 110V 标称 72V Nominal voltage 110V(W)	66~160VDC 45~135VDC
-------------------------------	----------------------------------------------------------------------	------------------------

### 输出特性 Output Features


输出电压精度 Voltage tolerance	标称电压 Nominal voltage	$V_{o1} \leq \pm 1\%$ (3.3V、5V $\leq \pm 2\%$ ) , $V_{o2} \leq \pm 3\%$
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	$V_{o1} \leq \pm 0.5\%$ , $V_{o2} \leq \pm 1.5\%$
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	$V_{o1} \leq \pm 0.5\%$ , $V_{o2} \leq \pm 3\%$
纹波噪声 Ripple&Noise	20M 带宽 20M Bandwidth	$\leq 1\%$
温度系数 Temperature coefficient		$\pm 0.02\%/^{\circ}\text{C}$
过功率保护 Output overpower Protection		115~150%额定功率, 自恢复 115~150%rated outputt power,auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term,auto recovery
启动延迟时间 Turn-on delay time	输入标称电压、满载 Input rated voltage、Fullload	$\leq 300\text{mS}$
保持时间 Hold up time	输入标称电压、满载 Input rated voltage、Fullload	80ms (典型值) 80ms (typical)
过冲幅度 Overshoot	25%额定负载变化 25% rated load change $\Delta V_{o1} / V_{o1}$	$\leq 500\mu\text{s}$ $\leq \pm 5.0\%$

### 一般特性 General Features

隔离耐压 Withstand voltage	输入对输出 I/P-O/P (1分钟, 漏电流 $\leq 5\text{mA}$ ) (1Minutte, leakage current) $\leq 5\text{mA}$	1500VDC
绝缘电阻 Isolation resistance	500V	$\geq 100\text{M}\Omega$
MTBF	环境 25°C Environment 25°C	$2.0 \times 10^5\text{Hrs}$
开关频率 switching frequency		300KHz
工作温度 Operating temperature	70°C 以上降额使用 Above 75°C derating make	-45°C~85°C
储存温度 Storage temperature		-45°C~105°C
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

## 命名方式 Naming Rules

JWDH R10-72 S5 S12 I

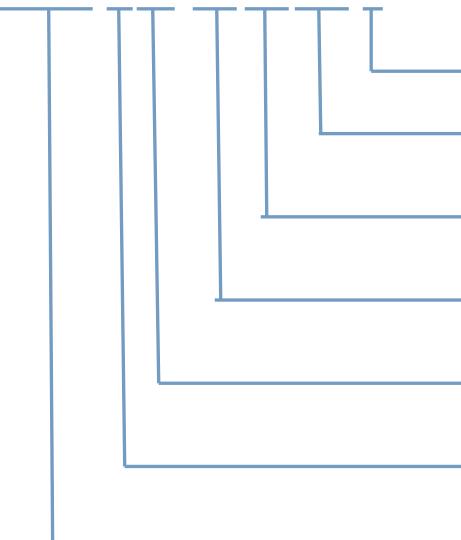

隔离输出  
Isolate output  
输出电压  $v_{o2}$   
Output voltage  $v_{o2}$   
输出电压  $v_{o1}$   
Output voltage  $v_{o1}$   
标称输入电压  
Nominal Input voltage  
输出功率  
Output power  
铁路机车产品  
Railway locomotive machinery  
DC/DC 电源模块 H 型封装系列  
DC/DC power module H Package type series

## 产品选型 Product selection

产品型号 Model No.	输入电压 Input voltage $V_{in}$	输出电压 Output voltage $V_o$	输出电流 Output current $I_o$	输出电压精度 Output voltage tolerance	纹波噪声 R&N $V_{(P-P)mV}$	最大容性负载 Capacitive load maximum	效率 Efficiency
JWDHR10-110S5S12I	66~160V	+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	78%
		+12V	0.04~0.40A	$\pm 3\%$	120	330uF	
		+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	78%
		+15V	0.03~0.33A	$\pm 3\%$	120	220uF	
JWDHR10-110S5S24I	66~160V	+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	79%
		+24V	0.02~0.21A	$\pm 3\%$	150	100uF	
		+12V	0.06~0.60A	$\pm 2\%$	100	470uF	80%
		+5V	0.04~0.40A	$\pm 3\%$	80	330uF	
JWDHR10-110S12S5I	66~160V	+12V	0.06~0.60A	$\pm 1\%$	100	470uF	81%
		+12V	0.02~0.24A	$\pm 3\%$	100	110uF	
		+12V	0.06~0.60A	$\pm 1\%$	100	470uF	82%
		+15V	0.02~0.20A	$\pm 3\%$	120	100uF	
JWDHR10-110S12S24I	66~160V	+12V	0.04~0.40A	$\pm 1\%$	100	470uF	84%
		+24V	0.02~0.20A	$\pm 3\%$	150	110uF	
		+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	78%
		+12V	0.04~0.40A	$\pm 3\%$	120	330uF	
JWDHR10-110S5S15I	45~135V	+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	80%
		+15V	0.03~0.33A	$\pm 3\%$	120	220uF	
		+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	81%
		+24V	0.02~0.21A	$\pm 3\%$	150	110uF	
JWDHR10-72S5S24I	45~135V	+12V	0.06~0.60A	$\pm 2\%$	100	470uF	79%
		+5V	0.04~0.40A	$\pm 3\%$	80	330uF	
		+12V	0.06~0.60A	$\pm 1\%$	100	110uF	82%
		+15V	0.02~0.20A	$\pm 3\%$	120	110uF	
JWDHR10-72S12S5I	45~135V	+12V	0.04~0.40A	$\pm 1\%$	100	470uF	83%
		+24V	0.02~0.20A	$\pm 3\%$	150	330uF	
		+12V	0.06~0.60A	$\pm 1\%$	100	110uF	84%
		+15V	0.02~0.20A	$\pm 3\%$	120	110uF	
JWDHR10-72S12S12I	45~135V	+12V	0.02~0.24A	$\pm 3\%$	100	110uF	82%
		+12V	0.06~0.60A	$\pm 1\%$	100	470uF	
		+12V	0.06~0.60A	$\pm 1\%$	100	470uF	83%
		+15V	0.02~0.20A	$\pm 3\%$	120	110uF	
JWDHR10-72S12S15I	45~135V	+12V	0.04~0.40A	$\pm 1\%$	100	330uF	83%
		+24V	0.02~0.20A	$\pm 3\%$	150	110uF	
		+12V	0.06~0.60A	$\pm 1\%$	100	470uF	84%
		+15V	0.02~0.20A	$\pm 3\%$	120	110uF	
JWDHR10-72S12S24I	45~135V	+12V	0.02~0.20A	$\pm 3\%$	150	110uF	84%
		+24V	0.02~0.20A	$\pm 3\%$	150	110uF	
		+5V	0.10~1.00A	$\pm 2\%$	80	1100uF	78%
		+12V	0.04~0.40A	$\pm 3\%$	120	330uF	


注：因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

输出纹波噪声（峰-峰值）的测量，请参照模块测试说明中介绍的方法进行。

Note: Due to space limitations, the above list is only for some products. If other than a list of products, please contact the Company's sales department.

Output ripple noise measurement (peak - peak), please refer to the module test notes method is introduced.

## 封装尺寸图 Mechanical Data

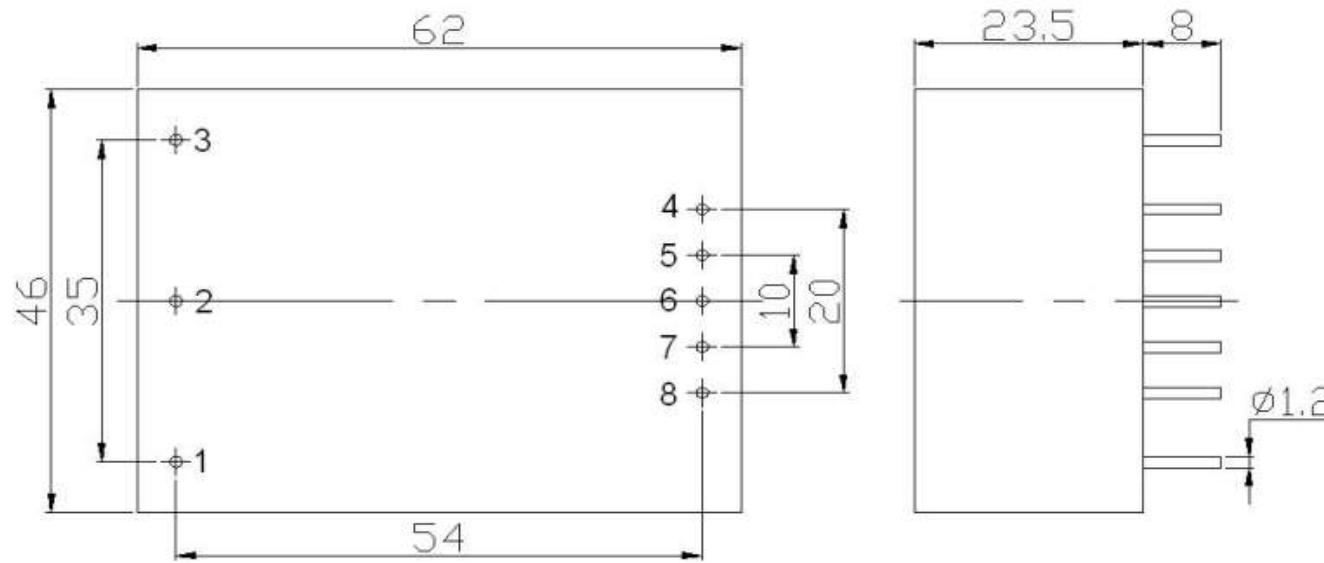

## 管脚定义 Pin Assignments


P1	P2	P3	P4	P5	P6	P7	P8
V <sub>in+</sub>	V <sub>in-</sub>	V <sub>O2+</sub>	GND2	NC	V <sub>O1+</sub>	GND1	V <sub>in+</sub>

注：电源模块的外形尺寸和管脚定义如与选型手册不符，请以实物实际尺寸为准。


Note: Dimensions and pin definitions of power module such as inconsistent with the hand book, please in kind prevail actual size

## 典型曲线 Typical curve

降额曲线  
Derating curve

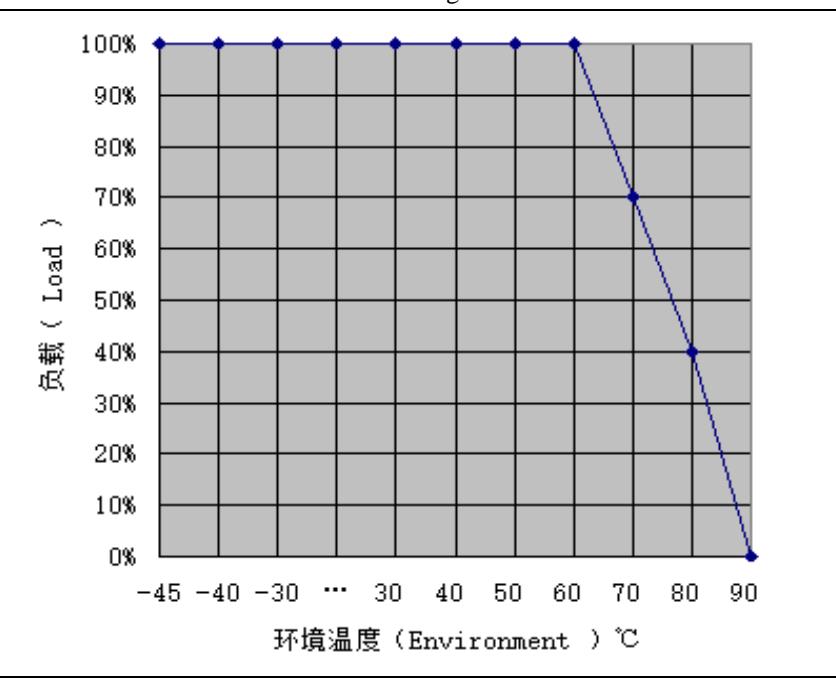

效率曲线  
Efficiency curve

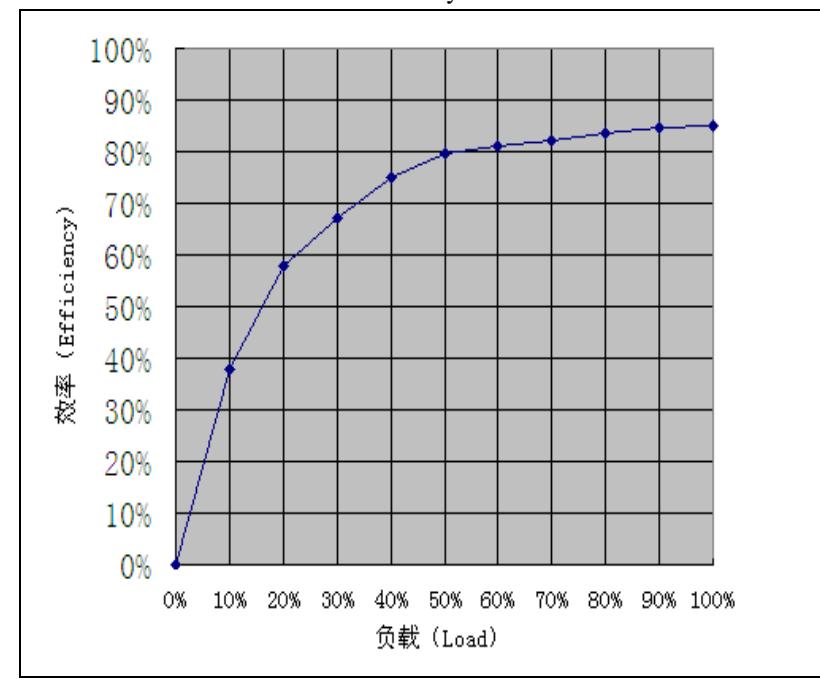

## 纹波噪声测试: (靠测法 20MHz)

测试方法: 纹波&噪声用示波器来测试。测试模块噪声时为了避免引入额外噪声, 须用示波器探头直接接触模块输出引脚

